

NIMONIC® alloy 115 (W. Nr. 2.4636) is a nickel-chromium-cobalt based alloy, strengthened with additions of molybdenum, aluminum and titanium. It was developed as a creep-resisting alloy for service at temperatures up to about 1010°C, as turbine blades for aircraft gas turbines.

Table 1 - Nominal Composition, %

Carbon	0.12-0.2
Silicon	1.0 max
Copper	0.2 max
Iron	1.0 max
Manganese	1.0 max
Chromium	14.0-16.0
Titanium	3.5-4.5
Aluminum	4.5-5.5
Cobalt	13.0-15.5
Molybdenum	3.0-5.0
Boron	0.01-0.025
Zirconium	0.15 max
Lead	0.0015 max
Sulfur	0.015 max
Nickel	Balance*

*Reference to the 'balance' of a composition does not guarantee this is exclusively of the element mentioned but that it predominates and others are present only in minimal quantities.

Available Products and Specifications

NIMONIC alloy 115 is available as rod and bar for forging, and as extruded and cold worked section for direct machining of turbine blades. Other forms may be produced against special order.

The alloy is designated W. Nr. 2.4636. Other specifications and designations include:

Billet, Bar, Forgings and Parts - BS HR 4, AECMA PrEn 2196 & 2197

Other - AICMA Ni-P102-HT, DIN NiCo15Cr15MoAlTi, AFNOR NCK 15ATD

Heat Treatment

The heat treatment for NIMONIC alloy 115 (forged bar) is a two-stage process involving solution treatment followed by aging.

The recommended procedure is:

1½ h/1190°C/AC + 6h/1100°C/AC

Physical & Mechanical Properties

Density	7.85 g/cm ³ (dependent on processing variables)
	0.284 lb/in ³ (dependent on processing variables)
Melting range	1260-1315°C
Specific Heat	444 J/kg-°C (20°C)
Thermal Conductivity	10.6 W/m-°C (20°C)
Electrical Resistivity	139 µΩ cm (20°C)

Table 2 - Mean Coefficient of Linear Thermal Expansion

°C	10 ⁻⁶ /°K
20-100	12.0
20-200	12.6
20-300	13.0
20-400	13.2
20-500	13.5
20-600	13.8
20-700	14.3
20-800	14.9
20-900	15.7
20-1000	17.0

Data for fully heat-treated material. Figures subject to ±5% variation approximately, due to processing variables.

Table 3 - Dynamic Young's Modulus

°C	MPa x 10 ³
20	216
100	212
200	206
300	200
400	194
500	188
600	182
700	174
800	167
900	156
1000	141

Values obtained from fully heat-treated cylindrical specimens vibrated in the flexural mode.

Publication Number SMC-094

Copyright © Special Metals Corporation, 2004 (Sept 04)

NIMONIC is a trademark of the Special Metals Corporation group of companies.



NIMONIC® alloy 115

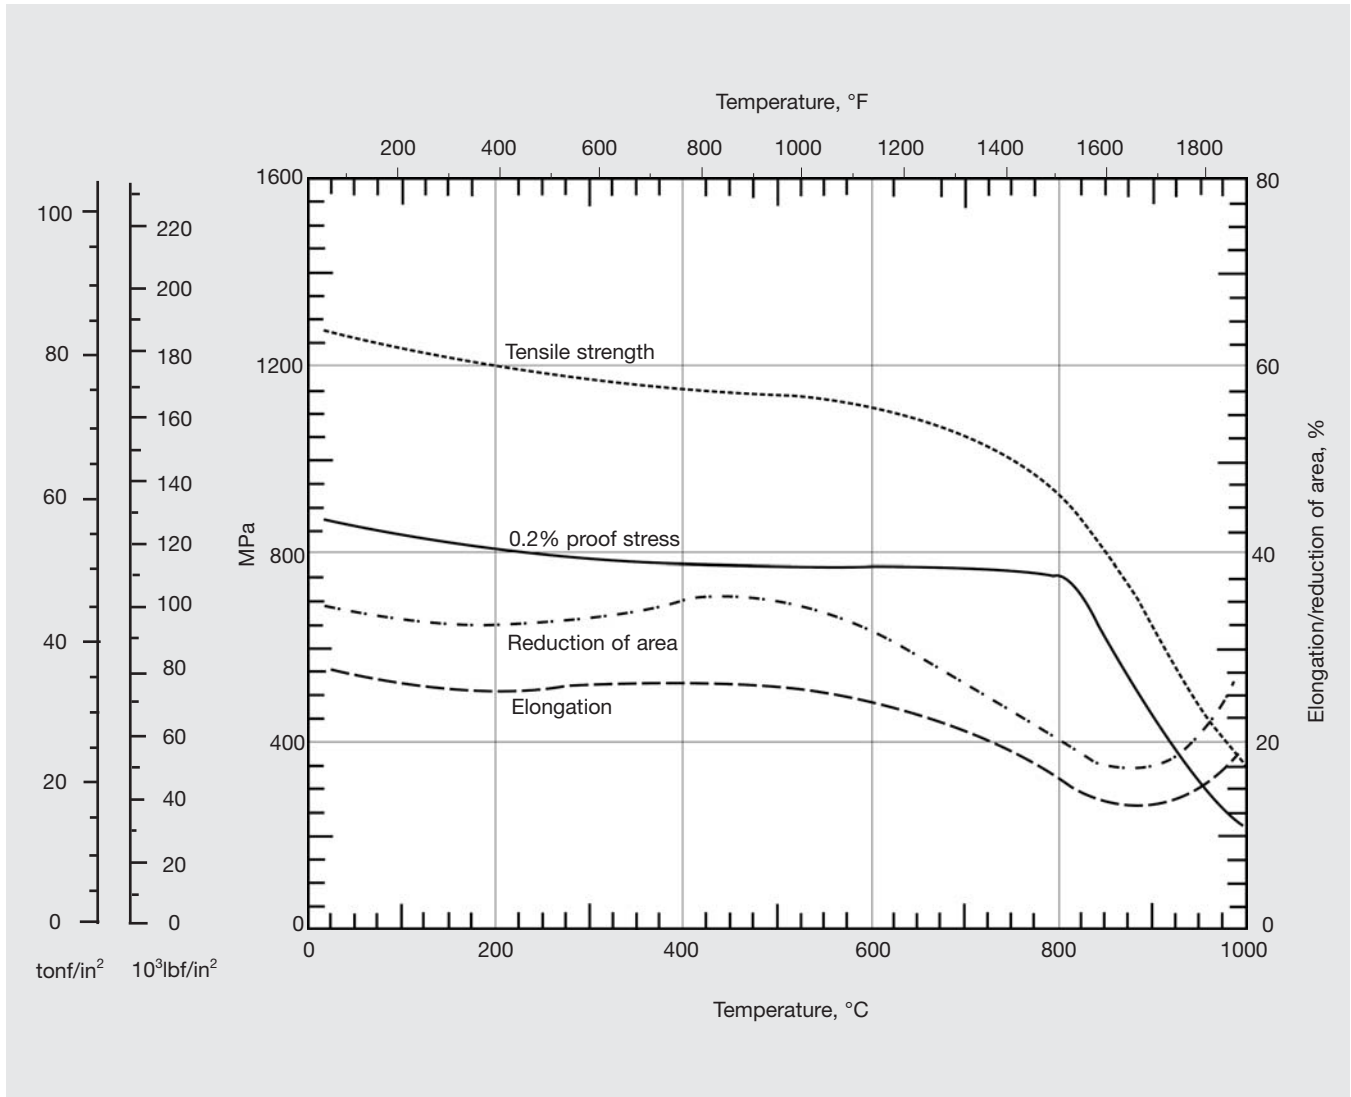


Figure 1. Tensile properties of forged bar. Heat treatment 1½ h/1190°C/AC + 6h/1100°C/AC

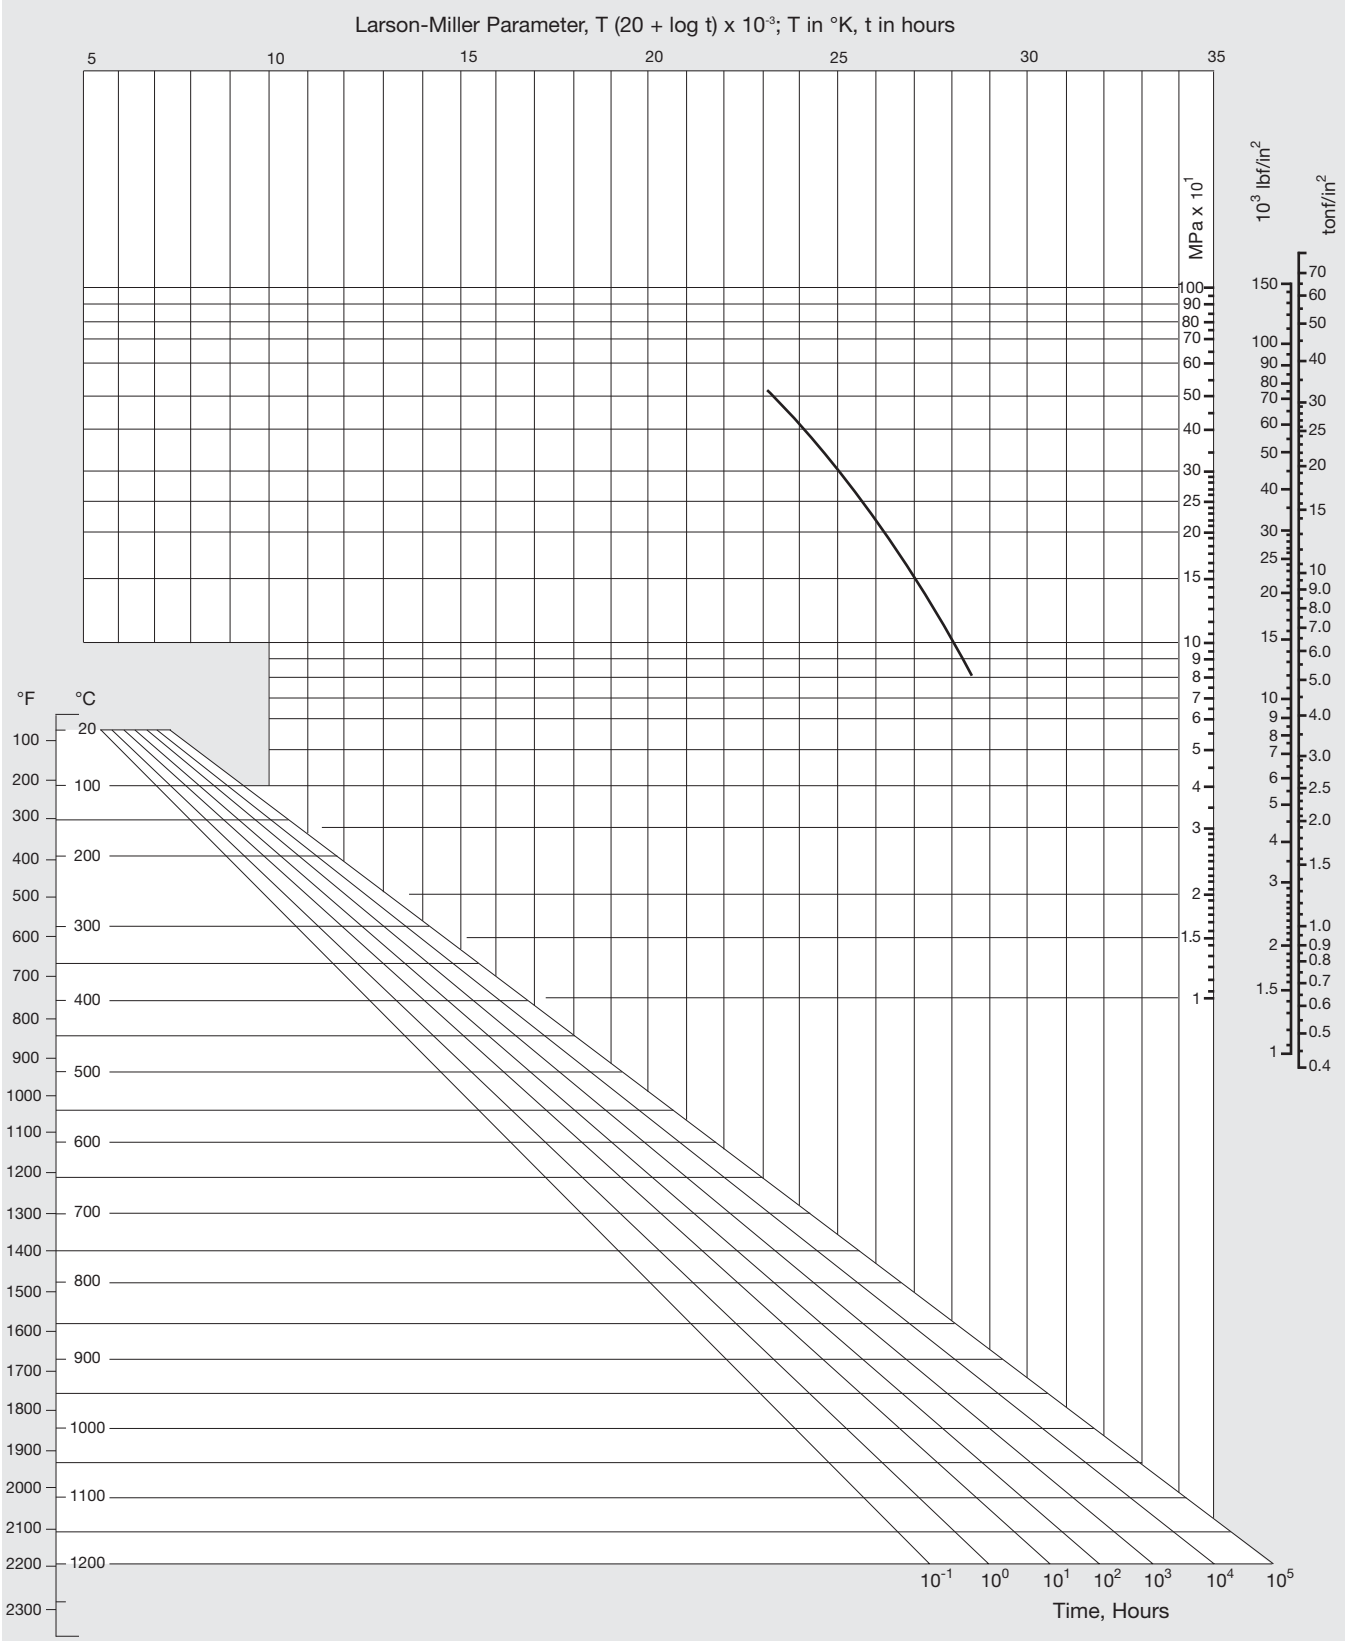


Figure 2. Creep-rupture properties of NIMONIC alloy 115 forged bar. Heat treatment 1.5 h/1190°C/AC+6h/1100°C/AC



www.specialmetals.com



U.S.A. Special Metals Corporation

Billet, rod & bar, flat & tubular products

3200 Riverside Drive
Huntington, WV 25705-1771
Phone +1 (304) 526-5100
+1 (800) 334-4626
Fax +1 (304) 526-5643

Billet & bar products

4317 Middle Settlement Road
New Hartford, NY 13413-5392
Phone +1 (315) 798-2900
+1 (800) 334-8351
Fax +1 (315) 798-2016

Atomized powder products

100 Industry Lane
Princeton, KY 42445
Phone +1 (270) 365-9551
Fax +1 (270) 365-5910

Shape Memory Alloys

4317 Middle Settlement Road
New Hartford, NY 13413-5392
Phone +1 (315) 798-2939
Fax +1 (315) 798-6860

United Kingdom

Special Metals Wiggin Ltd.

Holmer Road
Hereford HR4 9SL
Phone +44 (0) 1432 382200
Fax +44 (0) 1432 264030

Special Metals Wire Products

Holmer Road
Hereford HR4 9SL
Phone +44 (0) 1432 382556
Fax +44 (0) 1432 352984

China

Special Metals Pacific Pte. Ltd.

Room 1802, Plaza 66
1266 West Nanjing Road
Shanghai 200040
Phone +86 21 3229 0011
Fax +86 21 6288 1811

Special Metals Pacific Pte. Ltd.

Room 910, Ke Lun Mansion
12A Guanghua Road
Chaoyang District
Beijing 100020
Phone +86 10 6581 8396
Fax +86 10 6581 8381

France

Special Metals Services SA

17 Rue des Frères Lumière
69680 Chassieu (Lyon)
Phone +33 (0) 4 72 47 46 46
Fax +33 (0) 4 72 47 46 59

Germany

Special Metals Deutschland Ltd.

Postfach 20 04 09
40102 Düsseldorf
Phone +49 (0) 211 38 63 40
Fax +49 (0) 211 37 98 64

Hong Kong

Special Metals Pacific Pte. Ltd.

Unit A, 17th Floor, On Hing Bldg
1 On Hing Terrace
Central, Hong Kong
Phone +852 2439 9336
Fax +852 2530 4511

India

Special Metals Services Ltd.

No. 60, First Main Road, First Block
Vasanth Vallabha Nagar
Subramanyapura Post
Bangalore 560 061
Phone +91 (0) 80 2666 9159
Fax +91 (0) 80 2666 8918

Italy

Special Metals Services SpA

Via Assunta 59
20054 Nova Milanese (MI)
Phone +390 362 4941
Fax +390 362 494224

The Netherlands

Special Metals Service BV

Postbus 8681
3009 AR Rotterdam
Phone +31 (0) 10 451 44 55
Fax +31 (0) 10 450 05 39

Singapore

Special Metals Pacific Pte. Ltd.

24 Raffles Place
#27-04 Clifford Centre
Singapore 048621
Phone +65 6532 3823
Fax +65 6532 3621

Affiliated Companies

Special Metals Welding Products

1401 Burriss Road
Newton, NC 28658, U.S.A.
Phone +1 (828) 465-0352
+1 (800) 624-3411
Fax +1 (828) 464-8993

Canada House
Bidavon Industrial Estate
Waterloo Road
Bidford-On-Avon
Warwickshire B50 4JN, U.K.
Phone +44 (0) 1789 491780
Fax +44 (0) 1789 491781

Controlled Products Group

590 Seaman Street, Stoney Creek
Ontario L8E 4H1, Canada
Phone +1 (905) 643-6555
Fax +1 (905) 643-6614

A-1 Wire Tech, Inc.

A Special Metals Company
4550 Kishwaukee Street
Rockford, IL 61109, U.S.A.
Phone +1 (815) 226-0477
+1 (800) 426-6380
Fax +1 (815) 226-0537

Rescal SA

A Special Metals Company
200 Rue de la Couronne des Prés
78681 Epône Cédex, France
Phone +33 (0) 1 30 90 04 00
Fax +33 (0) 1 30 90 02 11

DAIDO-SPECIAL METALS Ltd.

A Joint Venture Company
Daido Shinagawa Building
6-35, Kohnan 1-chome
Minato-ku, Tokyo 108-0057, Japan
Phone +81 (0) 3 5495 7237
Fax +81 (0) 3 5495 1853

The data contained in this publication is for informational purposes only and may be revised at any time without prior notice. The data is believed to be accurate and reliable, but Special Metals makes no representation or warranty of any kind (express or implied) and assumes no liability with respect to the accuracy or completeness of the information contained herein. Although the data is believed to be representative of the product, the actual characteristics or performance of the product may vary from what is shown in this publication. Nothing contained in this publication should be construed as guaranteeing the product for a particular use or application.